


Highlights:

- Made in EU
- All-in-one solution
- Custom installation
- Easy and fast installation
- Combine multiple cables cores in one single cable

Product information:

The PAC252 is a hybrid power/audio cable which consists of 3 x 2,5mm² power section and two times a 2 x 0.22mm² 110 Ohm signal pair. The dual signal pair makes it ideal for applications where a stereo signal is needed or where the second pair is used as redundancy. The power and the 2 signal cables each have a separate jacket which makes it easy to split out the cables at the end.

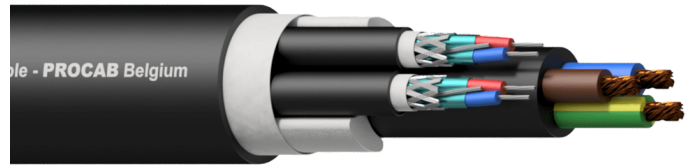


Components:

- CableType: HMX224 - 24 AWG Balanced signal / DMX-AES cable
- CableType: HPC3G2.5 - 3G2.5 3 x 2.5 mm² PVC power cable

Certification:



Properties:



Product Features:

Application	Rental & MI
Series	Bulk & Accessories

Physical Characteristics:

Components		2 x HMX224	
		1 x HPC3G2.5	
Outer jacket	Material	Highflex PVC 18.0 mm (Ø)	
		Colours	Black
Type of cable		Power & 2 x DMX-AES 110 Ω cable	
Filling		Non-woven (PET/PA) tape	

Standards & regulations:

RoHS2 compliant	According EU Directive 2011/65/EU
Reach compliant	According EC 1907/2006
Flammability test	According EN 60332-1-2

Mechanical Characteristics:

Temperature range	Fixed installation	- 15 °C till + 70 °C
	Mobile installation	- 5 °C till + 75 °C
Bending radius	Fixed installation	6 x outer diameter
	Mobile installation	8 x outer diameter

Variants:

- PAC252/1 - 100 meter
- PAC252/3 - 300 meter

Cross sections:

