


Highlights:

- Made in EU
- All-in-one solution
- Custom installation
- Easy and fast installation
- Combine multiple cables cores in one single cable

Product information:

The PHC2522 is a hybrid power / signal / network cable which consists of 3 x 2,5mm² power section, 2 x signal and 2 x CAT 7 LAN cable. This is the most flexible cable in terms of connectivity as the 2 signal and the 2 LAN cables can be used for the most different cases, while the 3 x 2.5mm² cables provides power to all equipment. All sections have a separate jacket which makes it easy to split out the cables at the end.

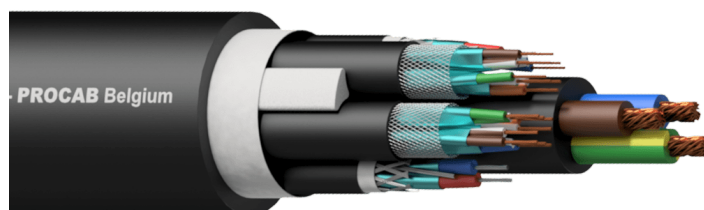


Components:

- CableType: HCT70S - CAT7 S/FTP networking cable
- CableType: HMX224 - 24 AWG Balanced signal / DMX-AES cable
- CableType: HPC3G2.5 - 3G2.5 3 x 2.5 mm² PVC power cable

Certification:



Properties:



Product Features:

Application	Rental & MI
Series	Bulk & Accessories

Physical Characteristics:

Components		2 x HCT70S
		2 x HMX224
		1 x HPC3G2.5
Outer jacket	Material	Highflex PVC 20.9 mm (Ø)
	Colours	Black
Type of cable		2 x Balanced signal / DMX-AES 110 Ω & 2 x CAT7 S/FTP Networking & 3G2.5 Power cable
Filling		Non-woven (PET/PA) tape

Standards & regulations:

RoHS2 compliant	According EU Directive 2011/65/EU
Reach compliant	According EC 1907/2006
Flammability test	According EN 60332-1-2

Mechanical Characteristics:

Temperature range	Fixed installation	- 15 °C till + 70 °C
	Mobile installation	- 5 °C till + 75 °C
Bending radius	Fixed installation	8 x outer diameter
	Mobile installation	10 x outer diameter

Variants:

- PHC2522/1 - 100 meter
- PHC2522/3 - 300 meter

Cross sections:

